


Q Motors




Q Motors

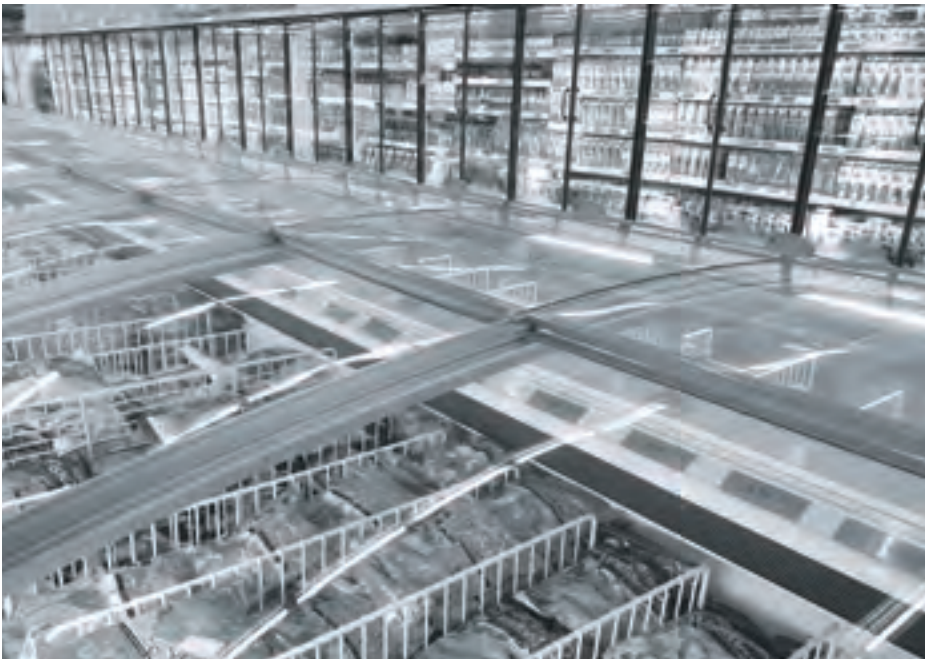

Model	Poles	Voltage (VAC)	Frequency (Hz)	Current	Input Watt	Output Watt	Speed (RPM)	Fan Blade	Rotation
83 A 230 SAC-5	4	230	50Hz	0.20	30	5	1300	200	CCW
83 A 230 SAC-7	4	230	50Hz	0.25	32	7	1300	230	CCW
83 A 230 SAC-10	4	230	50Hz	0.30	38	10	1300	230	CCW
83 A 230 SAC-16	4	230	50Hz	0.42	65	16	1300	254	CCW
83 A 230 SAC-25	4	230	50Hz	0.70	90	25	1300	300	CCW
83 A 230 SAC-34	4	230	50Hz	0.85	110	34	1300	300	CCW

Also available in Ball Bearing

Specifications subject to change without notice

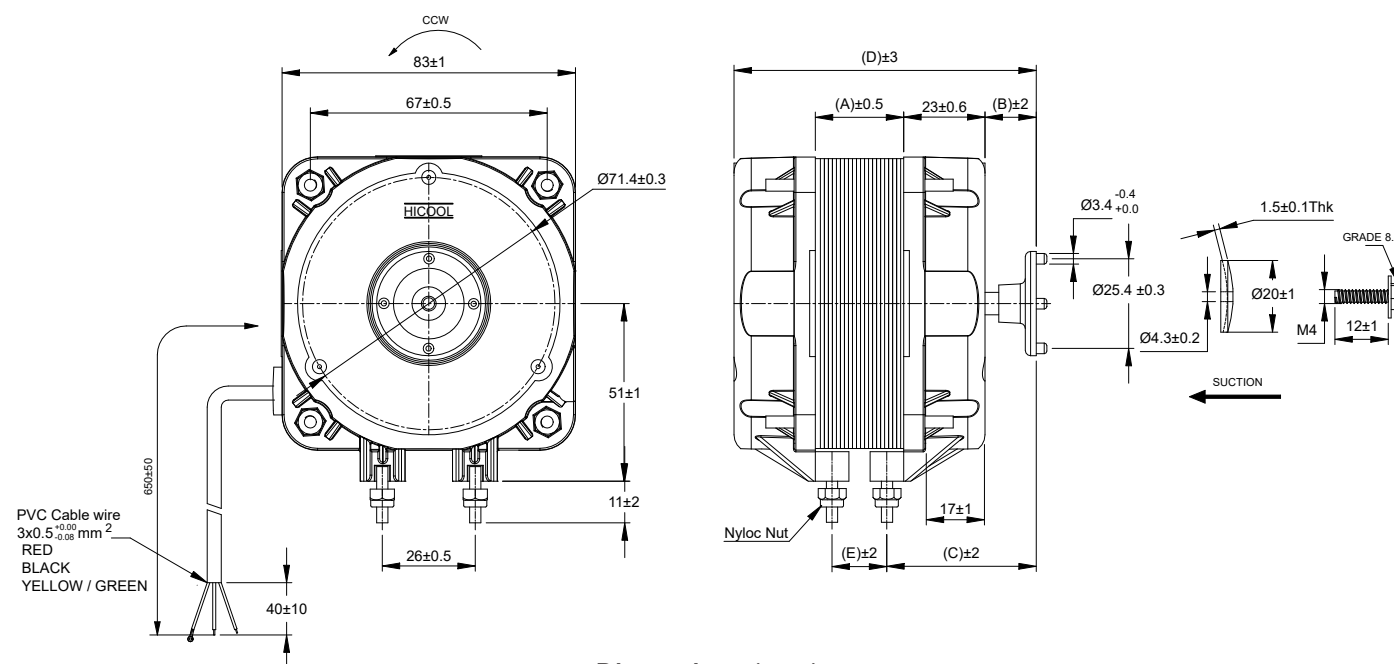

Dimensions (mm)

Model	A	B	C	D	E
83 A 230 SAC-5	13	13	41	73	-
83 A 230 SAC-7	19	13	41	79	-
83 A 230 SAC-10	19	13	41	79	-
83 A 230 SAC-16	25	13	41	86	-
83 A 230 SAC-25	40	25	53	112	31
83 A 230 SAC-34	45	28	56	121	36